

ISP Driver Installation Guide.



[This installation guide explains how to install the ISP driver. Before the scanner configuration, the scanner must enter to ISP mode to activate the configuration mode. Please refer to D500E instruction guide.]


Connect the scanner to computer, and scan the below barcode to switch to ISP setting mode.

ENTER	
ISP	


1. After switching to ISP setting mode. The screen will appear as below.




2. Select “**Install from a list or specific location (Advanced)**” option. The screen will appear as below.

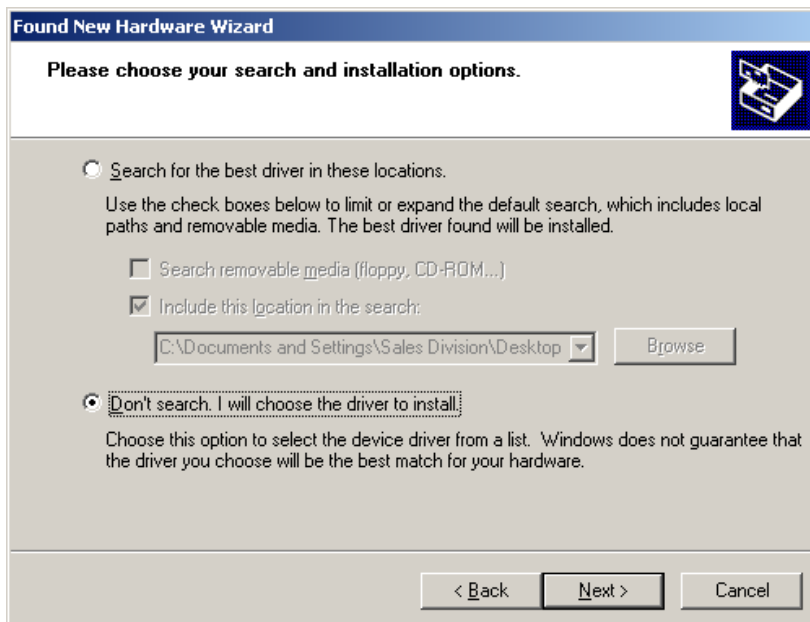


3. Select “**Don’t Search. I will choose the driver to install**” option, and select “**Next >**” for next step. The screen will appear as below.

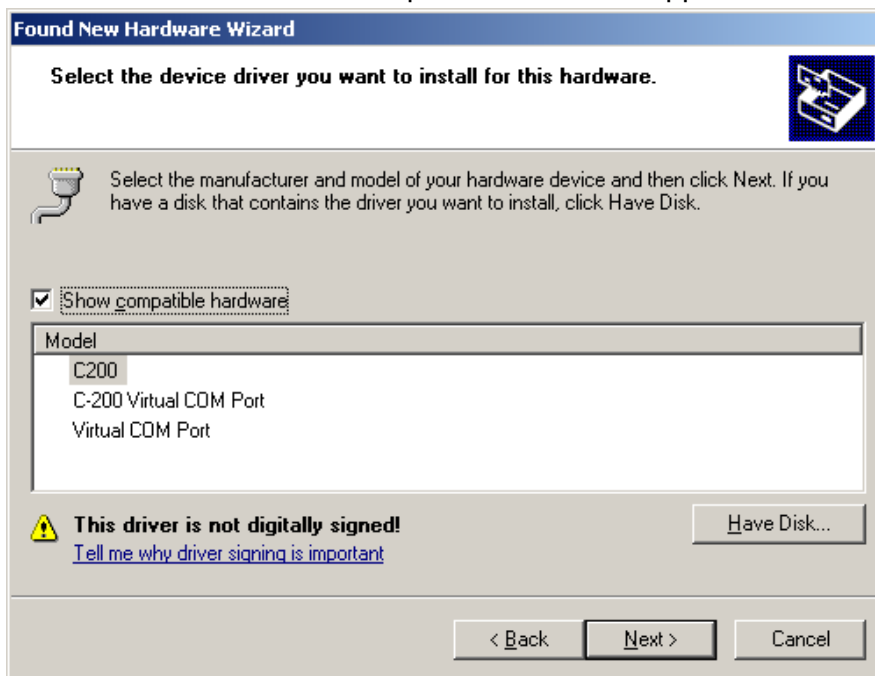

Select “**Have disk**” option, the screen will appear as below.

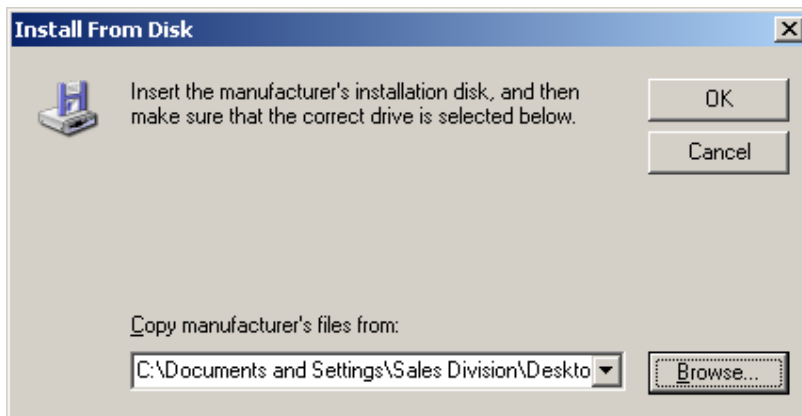


Select “**Browse**” to search the driver file (“C0801.inf”) under the Driver directory. Select “**OK**” the screen will appear as below.

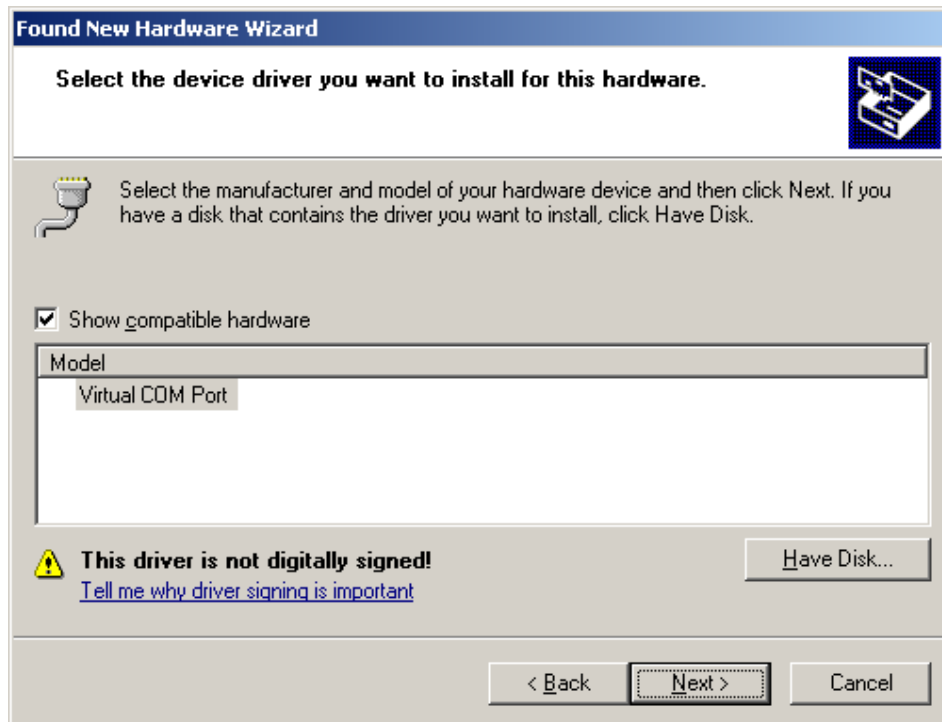


In this screen, select “**Next >**” to proceed the next step.


4. Scanner Driver installation will begin

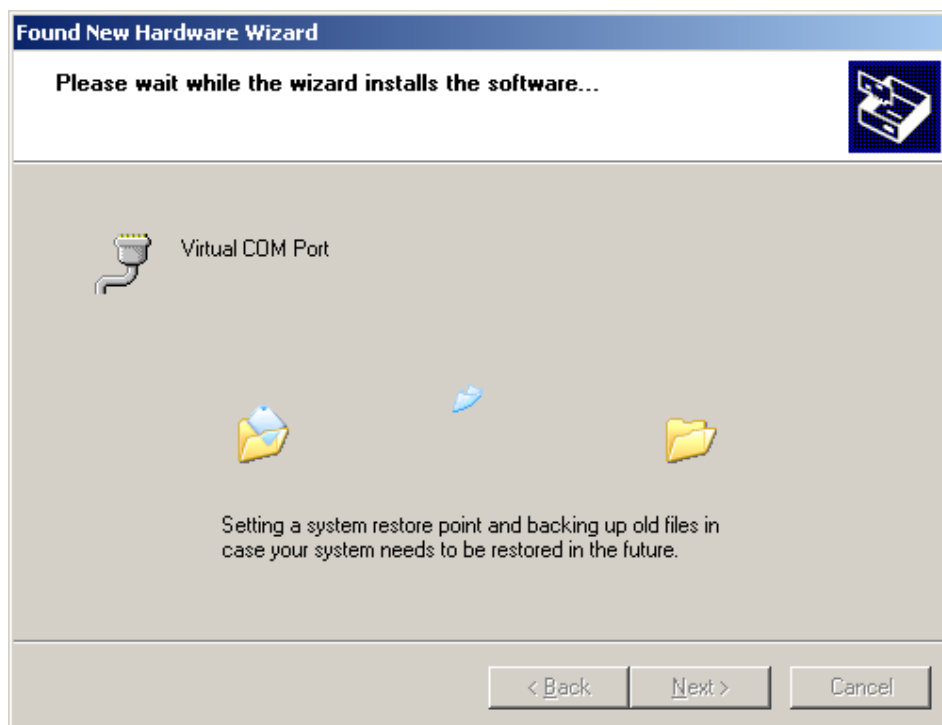


5. Scanner Driver completed. The screen will appear as below.

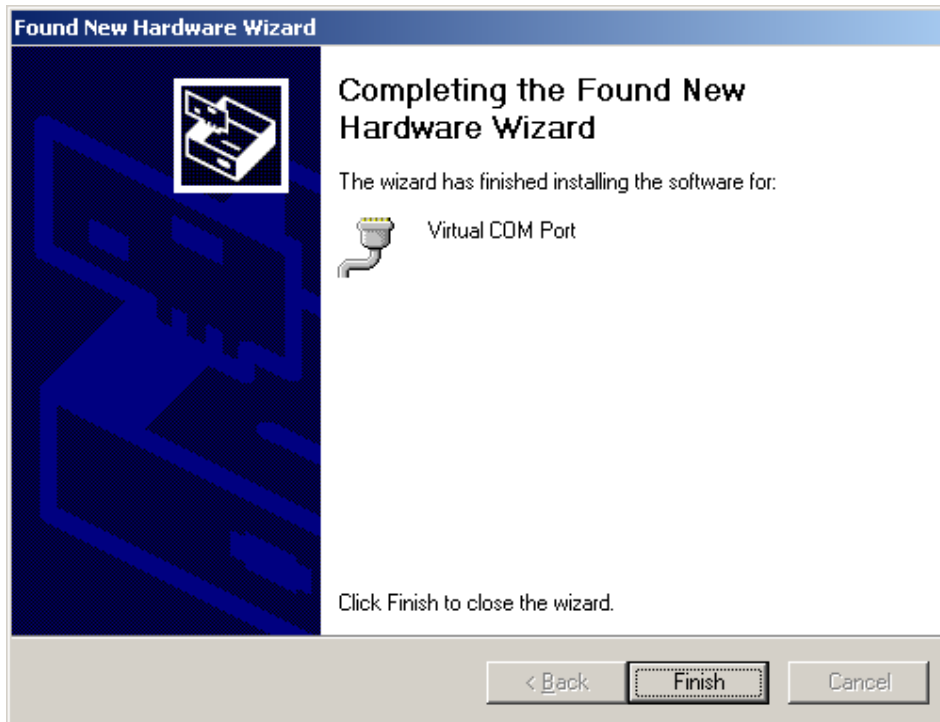

6. Select Property by right click the “**My computer**” icon. The screen will display **System Properties**.

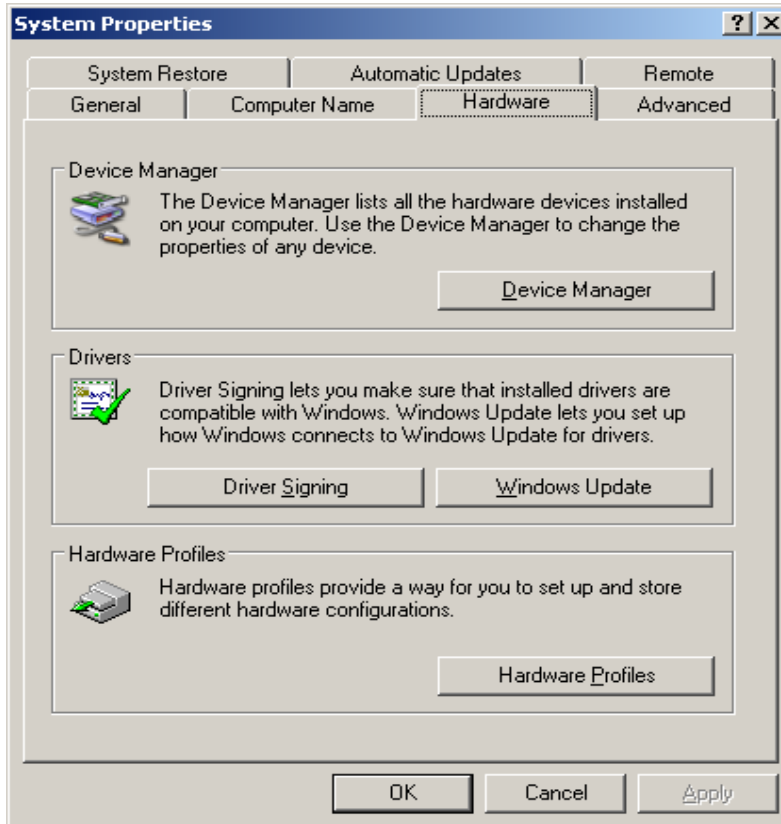

7. Click “Hardware” tab and select “Device Manager” The screen will appear as below.

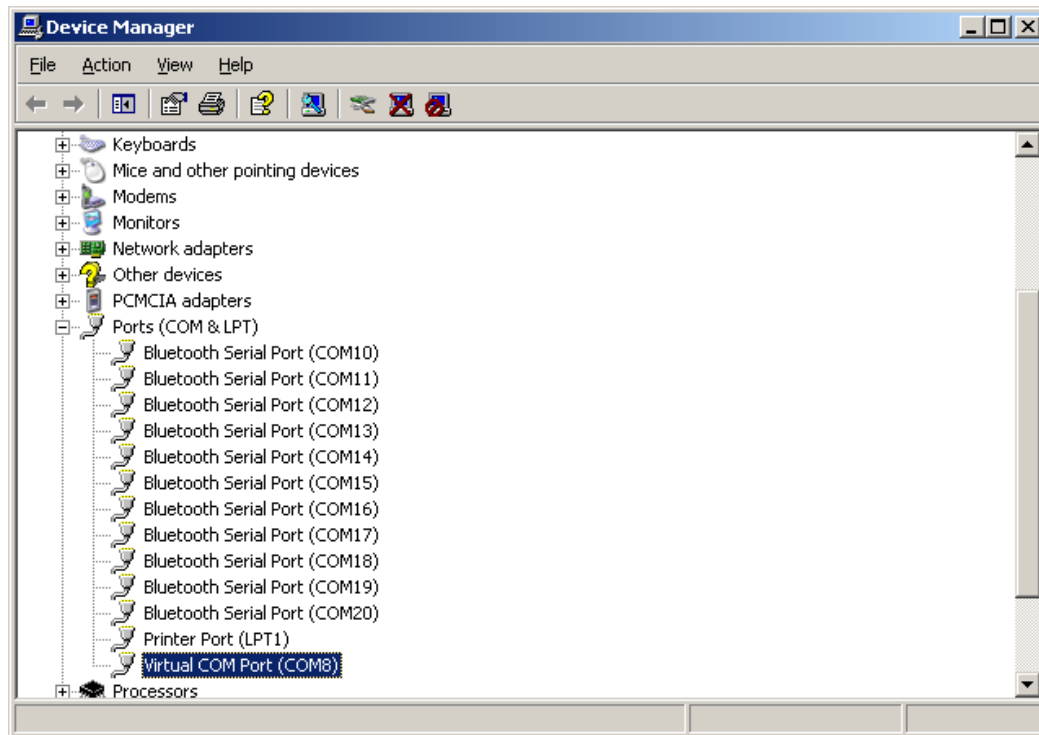

In this screen, the user can see the scanner COM port is in “COM8” under ISP mode.